DANGER: DISCONNECT A.C. POWER SOURCE BEFORE INSTALLING OR SERVICING FIXTURE!

STERNER™ INFRANOR™

WHEN INSTALLING ON A VERTICAL SURFACE, ENSURE CAPACITOR IS POSITIONED TOWARDS GROUND

VELA-8d PLATE MOUNT INSTALLATION/SERVICE INSTR.

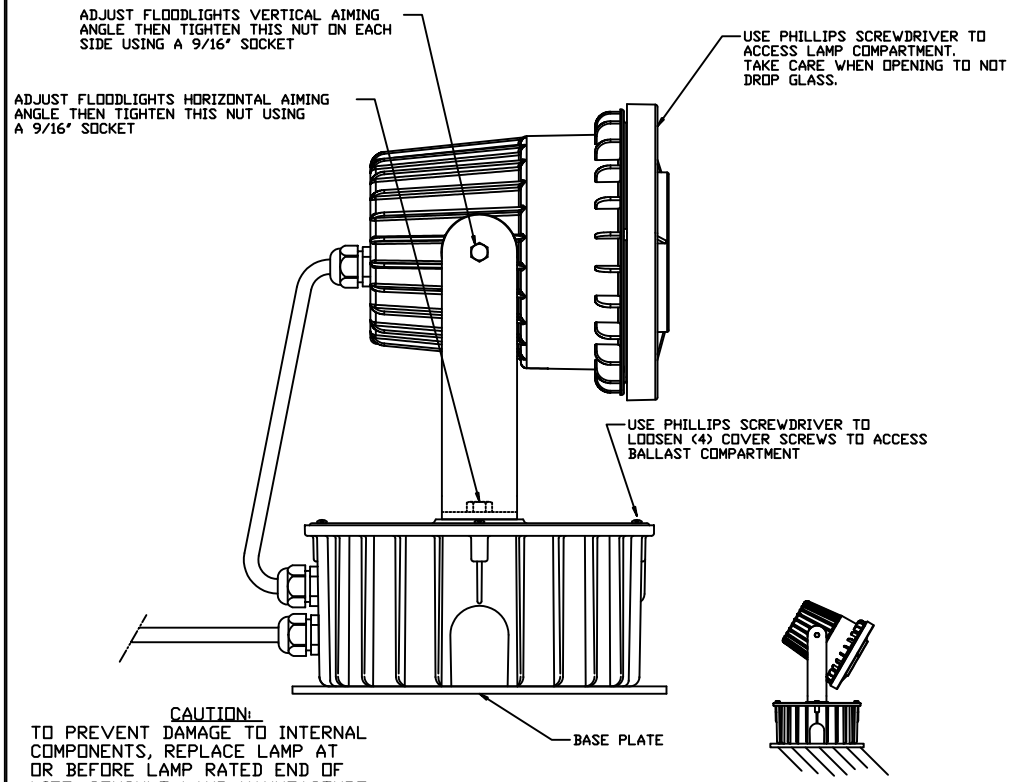

"CAUTION"
DO NOT AIM BACK ONTO A COMBUSTABLE MOUNTING SURFACE.

CAUTION:
TO PREVENT DAMAGE TO INTERNAL COMPONENTS, REPLACE LAMP AT OR BEFORE LAMP RATED END OF LIFE. CONSULT LAMP MANUFACTURE FOR SPECIFIC DETAILS ON LAMP LIFE AND RELAMPING RECOMMENDATIONS.

CAUTION
FIXTURE CONTAINS SILICONE AND EPDM GASKETS. CLEANING THE GLASS & FIXTURE SURFACES WITH STRONG CHEMICALS MAY DAMAGE THE GASKETS AND OR PAINT. USE CAUTION, FLUSH AND CLEAN WITH CLEAN WATER AFTER CLEANING WITH CHEMICALS.

DANGER: DISCONNECT A.C. POWER SOURCE BEFORE INSTALLING OR SERVICING FIXTURE!

STERNER™ INFRANOR™

WHEN INSTALLING ON A VERTICAL SURFACE, ENSURE CAPACITOR IS POSITIONED TOWARDS GROUND

VELA-8d WALL MOUNT INSTALLATION/SERVICE INSTR.

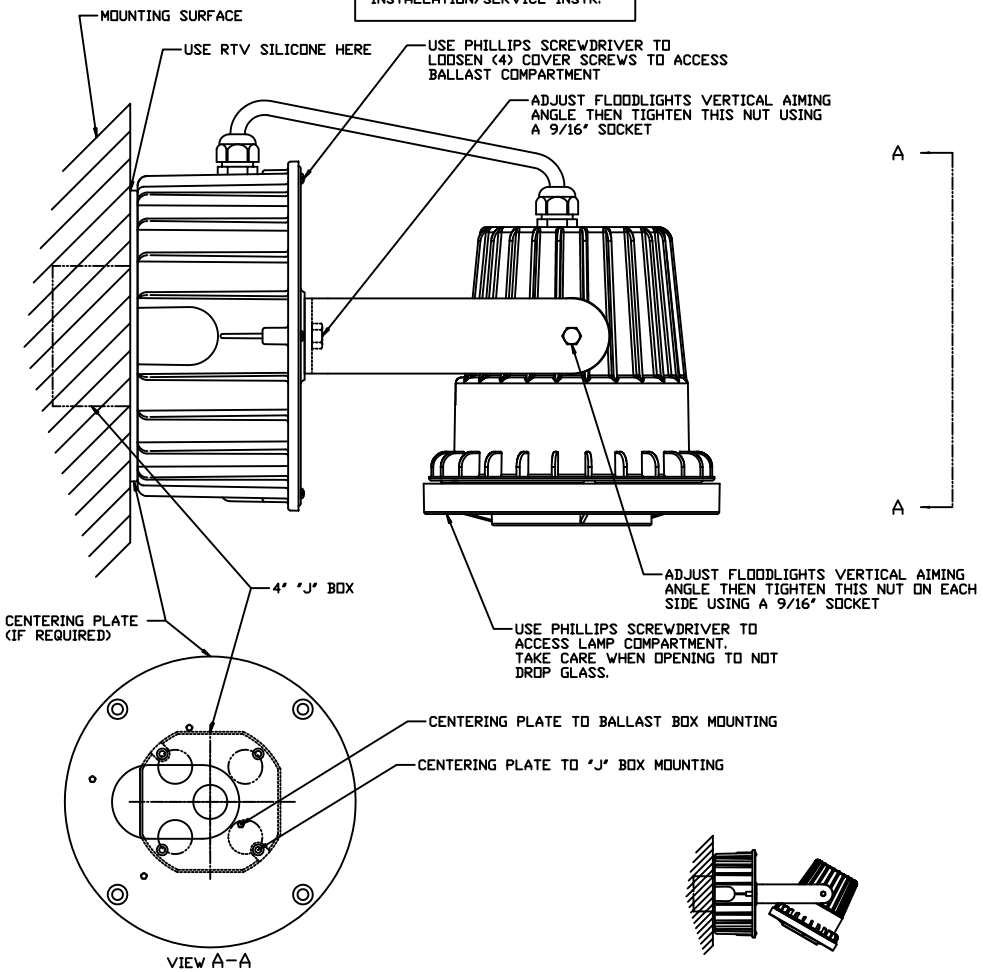

VIEW A-A

THE USE OF THE CENTERING PLATE IS OPTIONAL. MOUNT CENTERING PLATE TO "J" BOX EARS WITH SCREWS PROVIDED. SEALING (RTV SILICONE RECOMMENDED) OF THE "J" BOX TO THE CENTERING PLATE OR THE BALLAST BOX IS THE RESPONSIBILITY OF THE INSTALLER. MOUNT BALLAST BOX (WITH SUPPLIED GASKET BETWEEN BALLAST BOX AND CENTERING PLATE) TO CENTERING PLATE WITH SUPPLIED SCREWS.

"CAUTION"
DO NOT AIM BACK ONTO A COMBUSTABLE MOUNTING SURFACE.

C	ADDED CAUTION	JJF	9371	1/23/04			
B	ADDED CAUTION	JJF	9354	10/23/03	QUALIFIER	VENDOR	DESCRIPTION
A	UPDATED ADDRESS	JJF	9153	7/28/03	TOLERANCES .XX +/- .03	DR: FRENSKO	DATE: 10/4/00
SYM:	CHANGE MADE	DR:	CAR:	DATE:	TOLERANCES .XXX +/- .010	REF.:	IS: PRINT:
MATERIAL:					ANGULAR +/- 1 DEG.	M#:	SHEET 1 OF 1
BLANK SIZE:	FT, FT 2	FINISH CODES:	PRI	SEC	STERNER™	TITLE: INSTALLATION AND SERVICE INSTRUCTIONS, VELA-8d YOKE	
						RATIO: NONE	#: 7IS00647200 REV. C

STERNER LIGHTING SYSTEMS, INC. 351 LEWIS AVE. W. P.O. BOX 805 WINSTED MN. 55395-0805 PHONE: 320.485.2141 FAX: 320.485.2881

FILMED: