










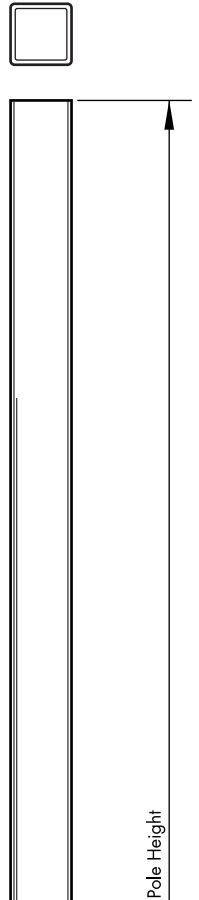
SSS – SQUARE STRAIGHT STEEL POLES

ORDER EXAMPLE

(1) (2) (3) (4) (5) (6) (7)
SSS20 / 4.0 / 0.120 / 28 / P / PRP / BK

ORDERING SEQUENCE

POLE CAT. NO.	SQUARE DIMENSION	WALL THICKNESS	MOUNTING	BASE	OPTIONS	FINISH	
(1)	(2)	(3)	(4)	(5)	(6)	(7)	
SSS10 ¹	See Pole Data Table Below	0.120" ^{1,2}			DF Duplex Groundfault Receptacle (15 amp, mounted 24" above grade)	Polyurethane Finish	
SSS12.5 ¹		0.188" ³				BK Black	
SSS15 ¹						PRP Pole Top Photocell Receptacle (arm mount fixtures only)	BZ Dark Bronze
SSS20 ¹						BN Break-Away Banner Arm Coupling (can use 0.75" or 1.25" pipe arms) (consult factory for specific ordering info.)	WH White
SSS25 ²							AL Natural Aluminum
SSS25 ²							NS Non-Standard Finish (consult factory)
SSS30 ³							



NOTES:

- 1) SSS10,12.5,15, 20, & 25 are available in 0.120" wall standard. 4) '10' applies to both arm & yoke mount fixtures.
 2) SSS25 is available in both 0.120" & 0.188" wall standard. 5) See below table for dimensions & bolt info.
 3) SSS30 available only in 0.188" wall standard.

POLE DATA

Pole Cat. No.	Square Dimension	Wall Thickness	Gauge	Pole Height	Bolt Circle	Anchor Bolt Projection	Anchor Bolts	Base Style	Base Cover Dimension	Conduit Opening Diameter	Estimated Shipping Weight	Allowable Pole EPA (steady wind/gusting wind x 1.3)			
												80/104	90/117	100/130	110/143
SSS10	4.0"	0.120"	11 ga.	10' - 0"	9.19"	3.00"	0.75" x 16" x 2"	P	9.88" Sq. x 3.56"	3.5"	83#	28.2	22.0	17.5	14.1
SSS12.5	4.0"	0.120"	11 ga.	12' - 6"	9.19"	3.00"	0.75" x 16" x 2"	P	9.88" Sq. x 3.56"	3.5"	100#	22.1	17.1	13.4	10.7
SSS15	4.0"	0.120"	11 ga.	15' - 0"	9.19"	3.00"	0.75" x 16" x 2"	P	9.88" Sq. x 3.56"	3.5"	115#	17.2	13.1	10.1	7.9
SSS20	4.0"	0.120"	11 ga.	20' - 0"	11.0"	3.00"	0.75" x 16" x 2"	P	10.88" Sq. x 3.56"	3.5"	148#	10.6	7.7	5.5	3.9
SSS25	4.0"	0.120"	11 ga.	25' - 0"	11.0"	3.00"	0.75" x 32" x 4"	P	11.38" Sq. x 4.56"	3.5"	181#	6.4	4.2	2.5	1.3
SSS25	5.0"	0.188"	7 ga.	25' - 0"	11.0"	5.00"	1.00" x 36" x 4"	P	11.38" Sq. x 4.56"	4.5"	330#	24.8	18.5	14.0	10.6
SSS30	5.0"	0.188"	7 ga.	30' - 0"	11.0"	5.00"	1.00" x 36" x 4"	P	11.38" Sq. x 4.56"	4.5"	391#	17.5	12.6	9.0	6.2

NOTES: Responsibility lies with the specifier for correct pole selection based on local codes and standards for the job location.
 (see Wind Map on page 13 for details)

